VASA SHOP




LURKER PRO+

Roof rack mounted LED light bar

Carry the load. Warn the road.

Made for service vans. LURKER PRO+ is a roof bar and a light bar in one: 360° warning, a work light of up to 6,000 lumens, a traffic advisor and stop/tail/turn – while still carrying ladders, pipes and tools.

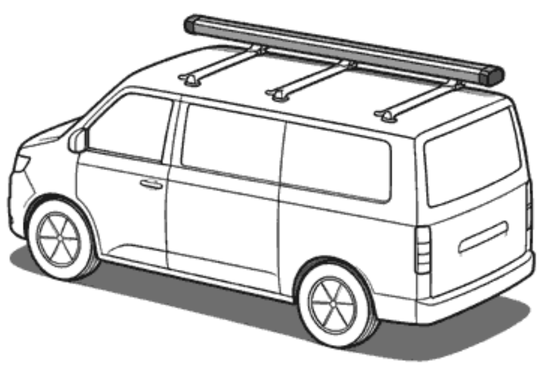



Your van. Your ladder.

**+ LURKER PRO+ roof bars:
now your roof warns 360°.**



One install, two functions

Mounts with the LURKER PRO+ bracket set and replaces a standard roof bar – warning light and roof bar in one.

50 kg per bar

Two bars carry up to 100 kg of ladders, pipes and tools. Max. 130 km/h unloaded, 80 km/h with a load.

Standard T-track

Open the silicone strip and slide in standard roof-bar accessories: load stops, ladder holders, straps.

Silicone lens, easy service

Silicone lens throughout; the side light modules pull out for quick service. IP68 + IP69K.

What's in the range



LURKER PRO+ 48″ light bar
016401TAW · 1206 mm · 180 W



LURKER PRO+ 58″ light bar
016402TAW · 1484 mm · 220 W



Control box
190301 · incl. 24-pin harness · up to 2 bars



2.4G wireless controller
032101 · 12 keys · 100 m range



Bracket set (2 brackets)
100174 · M6 screws · 4 Nm

Build your kit

Step	1 · Light bar	2 · Bracket set	3 · Control
Choose	48″ or 58″	If needed	Required – one of two
Item no.	016401TAW / 016402TAW	100174	190301 or 032101

Every light bar needs one control: the control box 190301 (incl. 24-pin harness, up to 2 light bars) or the 2.4G wireless controller 032101 (no control box needed).

Specifications

Voltage	DC 10–33 V
Size	48″: 1206 mm · 58″: 1484 mm · 101 mm high
Max power	48″: 180 W · 58″: 220 W
LEDs	48″: 162 amber + 156 white · 58″: 198 amber + 192 white
Max. speed	130 km/h unloaded · 80 km/h with a load
Max. load	50 kg with one bar · 100 kg with two
Functions	360° warning, work light, traffic advisor, stop/tail/turn
Connection	5 m cable · CAN bus via control box · 2.4 GHz
Housing	Black aluminium alloy, gunmetal grey · UV-resistant silicone
Protection	IP68 + IP69K · 10G · ISO 9227 · –30 to +70 °C
Mounting	Bracket set 100174 · M6 screws · 4 Nm
Approvals	ECE R65 TA2 / TB2, ECE R10

KEY FUNCTIONS

- 360° amber warning, 22 flash patterns
- White work light, up to 6,000 lm
- Traffic advisor
- Stop / tail / turn
- Ambient sensor: auto-dims at night
- Silicone lens; side light modules pull out for service
- Silicone strip opens to a standard T-track
- Aerodynamic top reduces wind noise
- Wireless sync with other warning lights

Installation

1 · Mount the bar
Fit the bracket set with M6 screws (4 Nm); the spacing adjusts to your roof.

2 · Connect the control
Wire the bar to the control box – or simply pair the 2.4G wireless controller.

For commercial, municipal, logistics and outdoor vehicles.